

# AC/DC Converter

## PVA120-27Bxx Series

# MORNSUN®

120W isolated AC-DC converter with ultra-wide, ultra-high 85 - 900VAC input for coalmine



RoHS

## FEATURES

- Specially designed for electrical equipment in coal mining industry
- Ultra-wide 85 - 900VAC input voltage range
- Industrial grade operating temperature: -25°C to +70°C
- High I/O isolation test voltage of 4000VAC
- High reliability, high efficiency, long lifespan
- Output short circuit, over-current and over-voltage protection
- Immunity, EFT/Surge: ±4KV perf. Criteria B

*PVA120-27Bxx series is a special power supply designed for customers who provide electrical equipment for coal mining industry to meet the requirements of safety in providing power supply, easy mounting and technology innovation etc. It features ultra-wide input voltage range from 85 to 900VAC which covers 127/220/380/660VAC used in coal mining industry, high isolation voltage, excellent EMS performance, multiple protections and high efficiency. They are widely used in monitoring and security sectors of coal mining industry.*

## Selection Guide

Part No.	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency at 330VAC (%) Typ.	Capacitive Load (μF) Max.
PVA120-27B28	120.4W	28V/4.3A	82	1500
PVA120-27B35	122.5W	35V/3.5A	82	1000

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range		85	--	900	VAC
Input Current	127VAC	--	--	2.5	A
	330VAC	--	--	1.5	
	660VAC	--	--	0.8	
Inrush Current	330VAC	--	--	140	
	660VAC	--	--	280	
	900VAC	--	--	360	
External input Fuse		6A/1000VAC, required			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	All load range	--	±2	--	%	
Line Regulation	All load	--	±0.5	--		
Load Regulation	0% - 100% load	--	±1	--		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	100	200	mV	
Temperature Coefficient		--	±0.02	--	%/°C	
Short Circuit Protection		Hiccup, continuous, self-recovery				
Over-current Protection		≥110%Io, hiccup, self-recovery				
Over-voltage Protection	28V output	≤40VDC				
	35V output	≤45VDC				
Min. Load		0	--	--	%	
Hold-up Time	Room temperature, Full load	330VAC input	--	40	--	ms
		660VAC input	--	80	--	

Note: \* The "Tip and barrel method" is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2019.10.11-A/1

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Test	Input - output	4000	--	--	VAC
Insulation Resistance	500VDC	$\geq 50 \times 10^6$			$\Omega$
Operating Temperature		-25	--	+70	°C
Storage Temperature		-40	--	+85	
Storage Humidity		--	--	95	%RH
Power Derating	-25°C to -10°C	2.6	--	--	% / °C
	+50°C to +70°C	2.0	--	--	
	85VAC-100VAC	3.3	--	--	% / VAC
	850VAC-900VAC	1.0	--	--	
Switching Frequency		--	65	--	kHz
MTBF		MIL-HDBK-217F@25°C $\geq 300,000$ h			



Mechanical Specifications

Dimensions	170.00 x 107.00 x 52.00mm
Weight	530g(Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)



Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6$ kV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 4$ kV	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2$ kV/line to ground $\pm 4$ kV	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A

Product Characteristic Curve

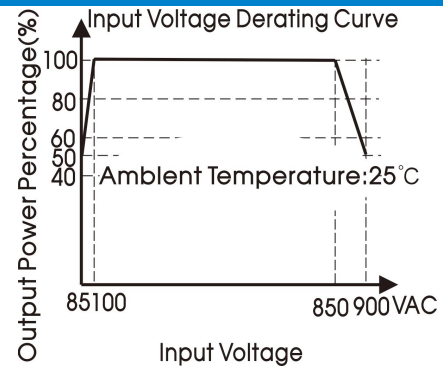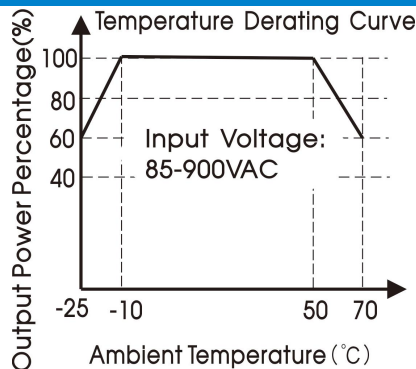

Note: ① With an input between 85 - 100VAC/850 - 900VAC, the output power must be derated as per temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

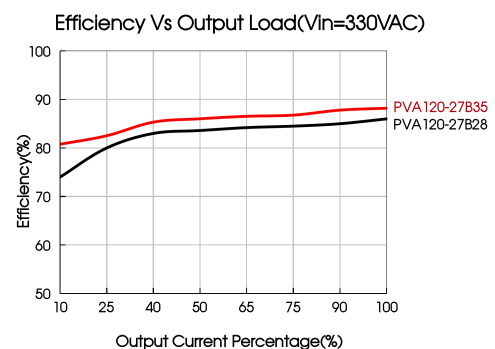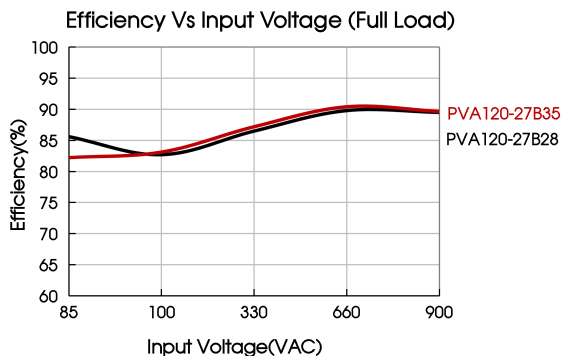

Design Reference

1. Typical application

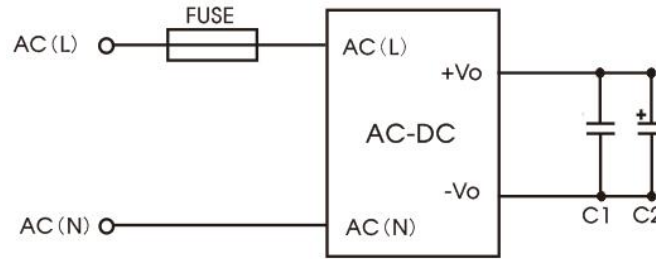



Fig. 1

Model	FUSE	C1	C2
PVA120-27Bxx	6A/1000VAC, required	1uF	10uF

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture' s datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise.

2. Trim Function for Output Voltage Adjustment (open if unused)

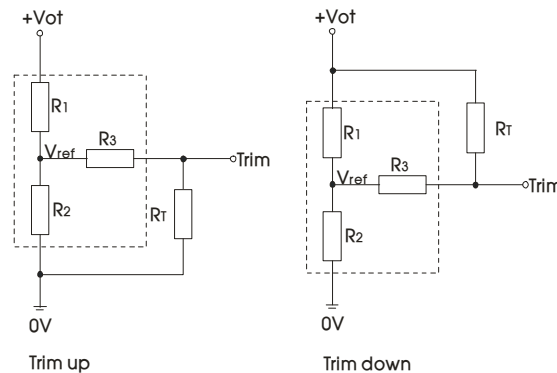

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:


$$\begin{aligned} \text{up: } R_T &= \frac{\alpha R_2}{R_2 - \alpha} - R_3 & \alpha &= \frac{V_{ref}}{V_{ot} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{\alpha R_1}{R_1 - \alpha} - R_3 & \alpha &= \frac{V_{ot} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$


$R_T$  = Trim Resistor value;  
 $\alpha$  = Self-defined parameter;

V <sub>out</sub>	R1(K $\Omega$ )	R2(K $\Omega$ )	R3(K $\Omega$ )	V <sub>ref</sub> (V)	V <sub>ot</sub> (V)
28V	16.35	1.59	1	2.5	Resulting trimmed output voltage, range $\leq \pm 10\%$
35V	19.82	1.5	1	2.5	

3. For more information Please find the application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

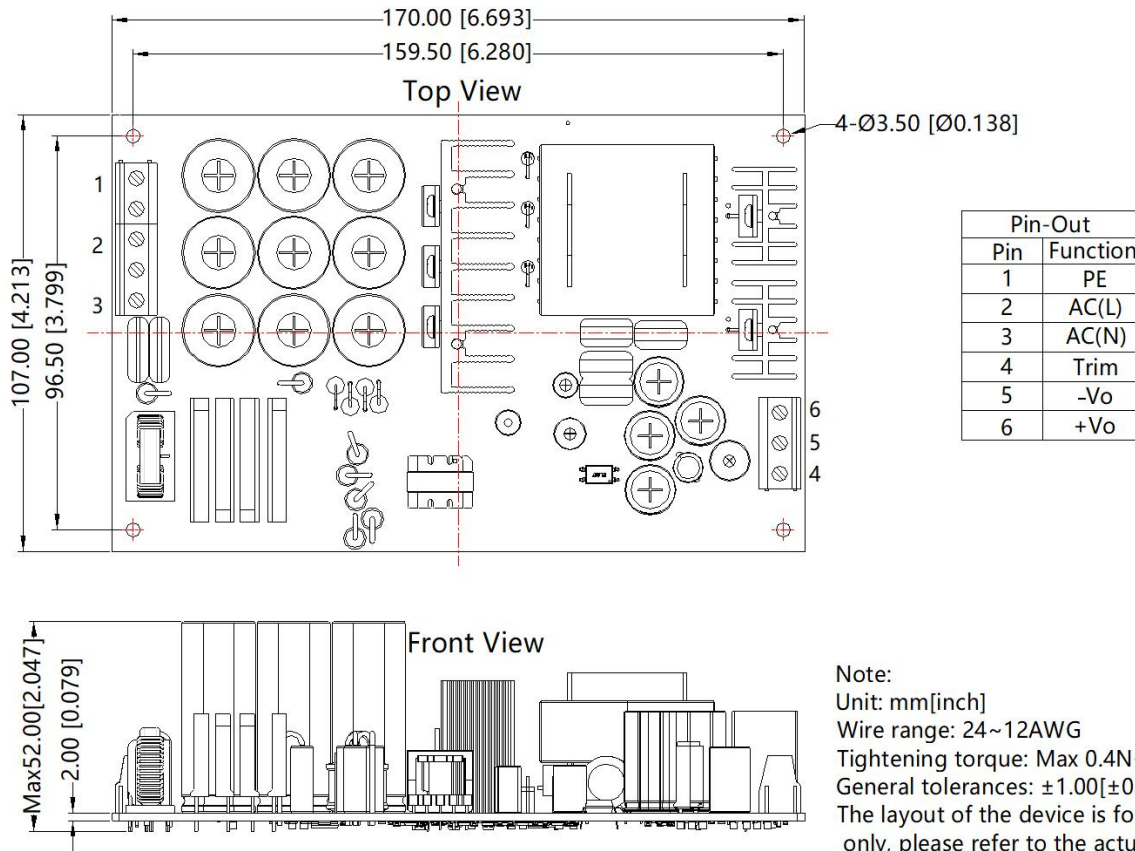

Note:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220073;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our company corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)