

1W isolated DC-DC converter  
Fixed input voltage, unregulated dual output



Continuous Short  
Circuit Protection



Patent Protection RoHS

## FEATURES

- Continuous short-circuit protection
- No-load input current as low as 5mA
- Operating ambient temperature range: -40°C to +105°C
- High efficiency up to 85%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out
- UL62368, EN62368 approved

A05\_XT-1WR3-TR series are specially designed for applications where two isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

## Selection Guide

| Certification | Part No.        | Input Voltage(VDC)   | Output           |                          | Full Load Efficiency(%)<br>Min./Typ. | Capacitive Load(μF)*<br>Max. |
|---------------|-----------------|----------------------|------------------|--------------------------|--------------------------------------|------------------------------|
|               |                 | Nominal<br>( Range ) | Voltage<br>(VDC) | Current(mA)<br>Max./Min. |                                      |                              |
| UL/CE         | A0505XT-1WR3-TR | 5<br>(4.5-5.5)       | ±5               | ±100/±10                 | 78/82                                | 1200                         |
|               | A0509XT-1WR3-TR |                      | ±9               | ±56/±6                   | 79/83                                | 470                          |
|               | A0512XT-1WR3-TR |                      | ±12              | ±42/±5                   | 79/83                                | 220                          |
|               | A0515XT-1WR3-TR |                      | ±15              | ±34/±4                   | 79/83                                | 220                          |
|               | A0524XT-1WR3-TR |                      | ±24              | ±21/±3                   | 81/85                                | 100                          |

Note: \* The specified maximum capacitive load for positive and negative output is identical.

## Input Specifications

| Item                                   | Operating Conditions | Min.               | Typ. | Max.   | Unit   |    |
|--|----------------------|--------------------|------|--------|--------|----|
| Input Current<br>(full load / no-load) | 5VDC input           | 5VDC output        | --   | 244/5  | 257/-- | mA |
|  |                      | 9VDC/12VDC output  | --   | 241/12 | 254/-- |    |
|  |                      | 15VDC/24VDC output | --   | 241/18 | 254/-- |    |
| Reflected Ripple Current*              |                      | --                 | 15   | --     | mA     |    |
| Surge Voltage (1sec. max.)             | 5VDC input           | -0.7               | --   | 9      | VDC    |    |
| Input Filter                           |                      | Capacitance filter |      |        |        |    |
| Hot Plug                               |                      | Unavailable        |      |        |        |    |

Note: \* Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

## Output Specifications

| Item                    | Operating Conditions      | Min.                                | Typ.  | Max. | Unit |       |
|-------------------------|---------------------------|-------------------------------------|-------|------|------|-------|
| Voltage Accuracy        |                           | See output regulation curve(Fig. 1) |       |      |      |       |
| Linear Regulation       | Input voltage change: ±1% | --                                  | --    | 1.2  | --   |       |
| Load Regulation         | 10%-100% load             | 5VDC output                         | --    | 10   | 15   | %     |
|                         |                           | 9VDC output                         | --    | 8    | 10   |       |
|                         |                           | 12VDC output                        | --    | 7    | 10   |       |
|                         |                           | 15VDC output                        | --    | 6    | 10   |       |
|                         |                           | 24VDC output                        | --    | 5    | 10   |       |
| Ripple & Noise*         | 20MHz bandwidth           | Other output                        | --    | 30   | 75   | mVp-p |
|                         |                           | 24VDC output                        | --    | 50   | 100  |       |
| Temperature Coefficient | Full load                 | --                                  | ±0.02 | --   | %/°C |       |

|                          |                           |
|--------------------------|---------------------------|
| Short-circuit Protection | Continuous, self-recovery |
|--------------------------|---------------------------|

Note: \* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

| Item                             | Operating Conditions  | Min.   | Typ. | Max. | Unit    |
|----------------------------------|---|--|------|------|---------|
| Isolation                        | Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max. | 1500   | --   | --   | VDC     |
| Insulation Resistance            | Input-output resistance at 500VDC   | 1000   | --   | --   | MΩ      |
| Isolation Capacitance            | Input-output capacitance at 100kHz/0.1V   | --   | 20   | --   | pF      |
| Operating Temperature            | Derating when operating temperature $\geq 100^{\circ}\text{C}$ , (see Fig. 2)       | -40  | --   | 105  | °C      |
| Storage Temperature              |   | -55  | --   | 125  |         |
| Case Temperature Rise            | $T_a=25^{\circ}\text{C}$  | --   | 15   | --   |         |
| Storage Humidity                 | Non-condensing  | --   | --   | 95   | %RH     |
| Reflow Soldering Temperature*    |   | Peak temp. $\leq 245^{\circ}\text{C}$ , maximum duration time $\leq 60\text{s}$ over $217^{\circ}\text{C}$ . |      |      |         |
| Switching Frequency              | Full load, nominal input voltage  | --   | 270  | --   | kHz     |
| MTBF                             | MIL-HDBK-217F@ $25^{\circ}\text{C}$   | 3500   | --   | --   | k hours |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD-020D.1  | Level 1  |      |      |         |

Note: \* For actual application, please refer to IPC/JEDEC J-STD-020D.1.



### Mechanical Specifications



|                 |  |
|-----------------|--|
| Case Material   | Black plastic; flame-retardant and heat-resistant (UL94 V-0) |
| Dimensions      | 15.24 x 11.40 x 7.25 mm                                      |
| Weight          | 1.4g(Typ.)   |
| Cooling methods | Free air convection  |

### Electromagnetic Compatibility (EMC)

|           |     |  |
|-----------|-----|--|
| Emissions | CE  | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)                     |
|           | RE  | CISPR32/EN55032 CLASS B (see Fig. 4 for recommended circuit)                     |
| Immunity  | ESD | IEC/EN61000-4-2 Air $\pm 8\text{kV}$ , Contact $\pm 4\text{kV}$ perf. Criteria B |

### Typical Characteristic Curves

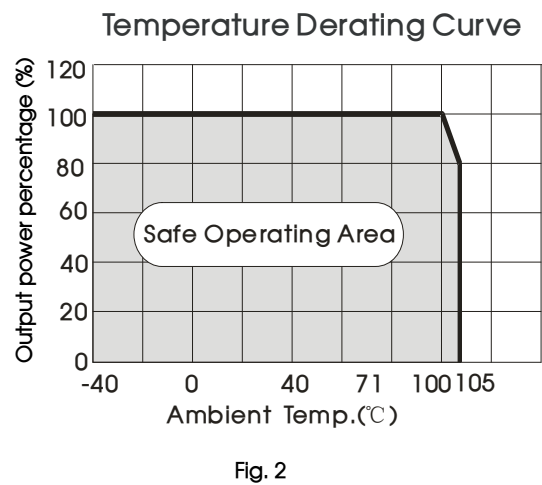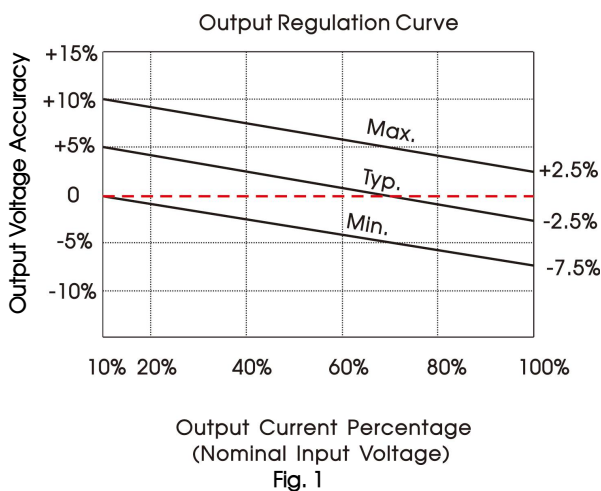

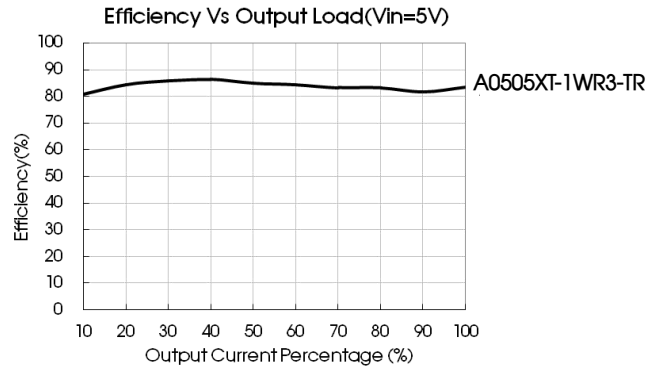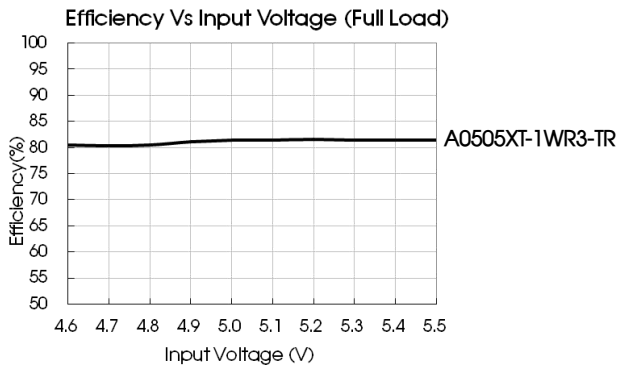


Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.

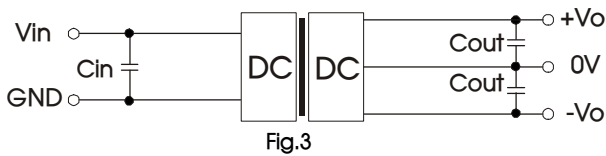

Recommended capacitive load value table (Table 1)

| Vin  | Cin       | Vo         | Cout(μF)  |
|------|-----------|------------|-----------|
| 5VDC | 4.7μF/16V | ±5VDC      | 4.7μF/16V |
|      |           | ±9VDC      | 2.2μF/16V |
|      |           | ±12VDC     | 1μF/25V   |
|      |           | ±15/±24VDC | 1μF/50V   |

2. EMC (CLASS B) compliance circuit

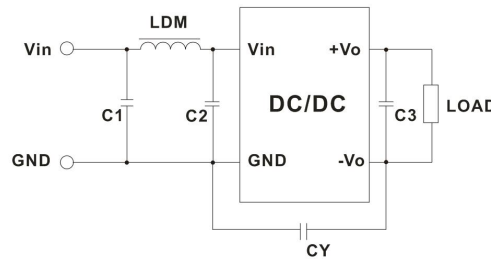


Fig. 4


EMC recommended circuit value table (Table 2)



| Input voltage | Output voltage(VDC)          | 5/9  |     | 12/15/24   |            |            |
|---------------|------------------------------|------|-----|--|------------|------------|
|               |                              | 5VDC | EMI | C1/C2  | 4.7μF /25V | 4.7μF /25V |
| CY            | --                           |      |     | 1nF/2kVDC<br>HEC C1206X102K202T<br>JOHANSON 202R18W102KV4E |            |            |
| C3            | Refer to the Cout in table 1 |      |     |  |            |            |
| LDM           | 6.8μH                        |      |     | 6.8μH  |            |            |

Note: In the case of actual use, the requirements for EMI are high, it is subject to CY.

3. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

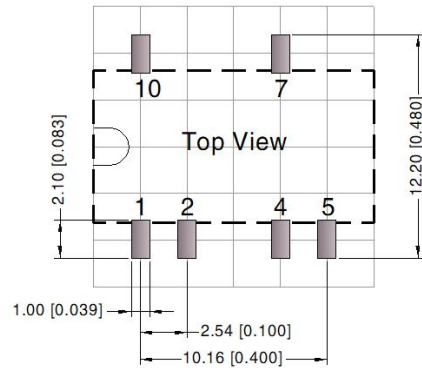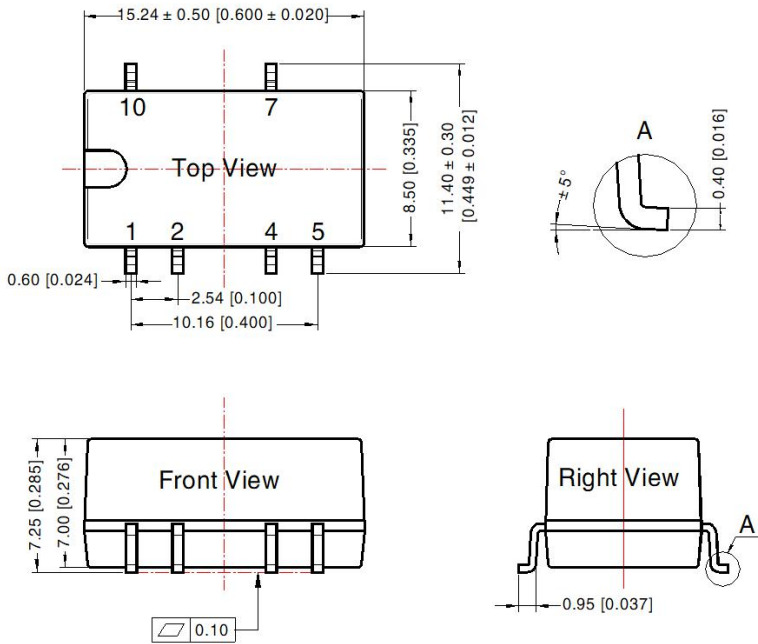


Note: Grid 2.54\*2.54mm

Note:  
Unit: mm[inch]  
Pin section tolerances:  $\pm 0.10$  [± 0.004]  
General tolerances:  $\pm 0.25$  [± 0.010]

| Pin-Out |      |
|---------|------|
| Pin     | Mark |
| 1       | GND  |
| 2       | Vin  |
| 4       | 0V   |
| 5       | -Vo  |
| 7       | +Vo  |
| 10      | NC   |

NC: Pin to be isolated from circuitry

Tape and Reel Info

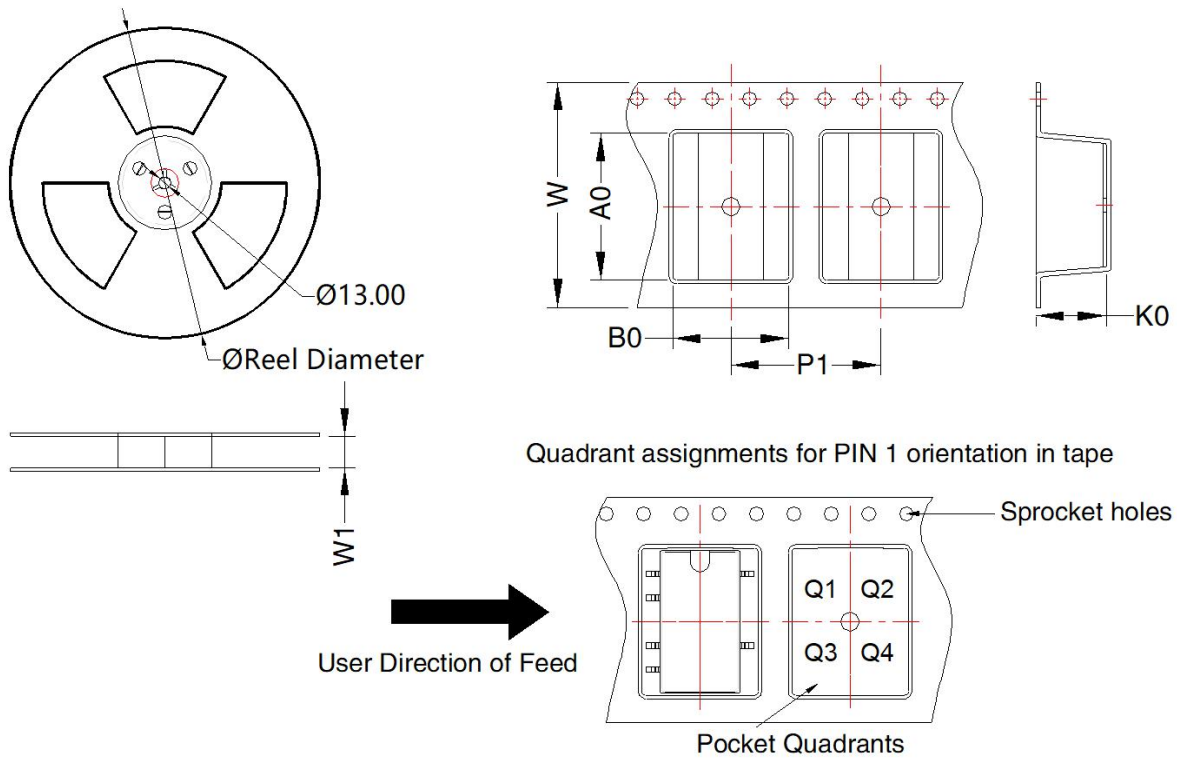

| Device       | Package Type | Pin | MPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| A_XT-1WR3-TR | SMD          | 6   | 500 | 330.0              | 24.5               | 15.64   | 12.4    | 7.45    | 16.0    | 24.0   | Q1            |

Notes:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Roll Packaging bag number: 58210034;
2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on our company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)