AC/DC 120W Enclosed Switching Power Supply MORNSUN® LOF120-20Bxx-C Series







UL62368-1 IEC62368-1 EN62368-1

ES60601-1 EN60335-1 EN61558-1

EN60601-1

FEATURES

- Universal 85 264VAC or 120 370VDC input voltage
- Operating ambient temperature range: -40 $^{\circ}$ C to +85 $^{\circ}$ C
- Active PFC
- High I/O isolation test voltage up to 4000VAC
- Operating altitude up to 5000m
- Extremely low leakage current < 0.1mA
- Stand-by power consumption 0.5W Typ.
- The base plate with conformal coating
- Output short circuit, over-current, over-voltage,
- Efficiency up to 95%
- over-temperature protection
- Suitable for BF application
- Installing in system of Safety Class I/II is available



LOF120-20Bxx-C series is one of Mornsun's enclosed AC-DC switching power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC and safety performance, which meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, medical, etc.

Selection Guide									
Certification	Part No.*	Nominal Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Transient Output Power*10S (W)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)		
	LOF120-20B12-C	114	12V/9.5A	141.6	11.4-12.6	94	6000		
	LOF120-20B15-C	114	15V/7.6A	142.5	14.3-15.8	94	5000		
111 /FN1/IFC	LOF120-20B24-C	120	24V/5A	150	22.8-25.2	95	3200		
UL/EN/IEC	LOF120-20B27-C	119.9	27V/4.44A	149.8	25.6-28.4	95	2400		
	LOF120-20B36-C	120	36V/3.33A	149.76	35.28-37.8	94	2000		
	LOF120-20B48-C	120	48V/2.5A	150	45.6-50.4	94.5	1600		
EN	LOF120-20B54-C	120	54V/2.22A	149.58	51.3-55.5	94	1300		

Note: 1.*If the total output power exceeds the nominal output power, it can be maintained for a maximum of 10s. The power supply cannot exceed the transient power. When the output voltage is increased, the total output power cannot exceed the nominal output power;

^{3.*}LOF open frame series is also available, named LOF120-20Bxx.

Input Specifications							
Item	Operating Condition	ons	Min.	Тур.	Max.	Unit	
Inner at Valtage a Demogra	AC input		85		264	VAC	
Input Voltage Range	DC input		120		370	VDC	
Input Voltage Frequency					63	Hz	
Inner de Command	115VAC		-		2	Α	
Input Current	230VAC		-		1		
Inrush Current	115VAC	Cold start		40			
iniush Cuireni	230VAC			75			
Power Factor	115VAC	Full Load	0.98		-		
FOWEI FUCIOI	230VAC	ruii Lodd	0.94			_	
Leakage Current	240VAC		<	<0.1mA; Single fault<0.5mA			
Hot Plug			Unav	ailable			



^{2.*}The maximum transient output power interval must be greater than 30 minutes;

AC/DC 120W Enclosed Switching Power Supply MORNSUN® LOF120-20Bxx-C Series



Item	Operating Conditions	Operating Conditions		Тур.	Max.	Unit	
.		12V/15V		±2.0			
Output Voltage Accuracy*	Full load range	24V/27V/36V/48V/54V		±1.0		0 ′	
Line Regulation	Rated load			±0.5		%	
Load Regulation	0% - 100% load			±1.0			
	20MHz bandwidth	12V/15V			120		
Ripple & Noise*	(peak-to-peak value)	24V/27V			150	mV	
		36V/48V/54V			200		
Temperature Coefficient				±0.03		%/℃	
Minimum Load			0			%	
Hold-up Time	230VAC, 25℃		15			ms	
Stand-by Power Consumption				0.5		W	
Short Circuit Protection	Recovery time < 3s after th	Recovery time < 3s after the short circuit disappear		Hiccup, continuous, self-recovery			
Over-current Protection				≥130% lo, hiccup, self-recovery			
	12V		<16V (Output voltage turn off, re-power on forecover)				
	15V	≤25V (Output voltage turn off, re-power on f recover) ≤32V (Output voltage turn off, re-power on f recover) ≤35V (Output voltage turn off, re-power on f recover) ≤50V (Output voltage turn off, re-power on f recover) ≤60V (Output voltage turn off, re-power on f recover)					
	24V						
Over-voltage Protection	27V 36V 48V						
	54V		60V (Output voltage turn off, re-power on f recover)				
Over-temperature Protection			Output voltage turn off, re-power on to recovery after abnormal removed				

Note: 1. *Output voltage accuracy: including the setting error, line regulation, load regulation;

- 3. "For all the above test items, please refer to our company standard "AC-DC Black Box Test Specification" for specific test specifications and methods;
- 4. *When the product works at light load (≤15% IO), in order to improve the efficiency to reach at green working mode, the value of ripple and noise will be double;
- 5. *Except for special instructions, the above data are measured at the full operating temperature range and humidity <75%.

General S	Specification	าร						
Item		Operating Conditions		Min.	Тур.	Max.	Unit	
Isolation Test	Input - 😩		Electric strength test for 1min., leakage current <10mA					
	Input - output	Electric strength te						VAC
	Output - 😩				1500			
	Input - 😩	Ambient temperat	Ambient temperature: $25 \pm 5^{\circ}$ C					MΩ
Insulation	Input - output	Relative humidity: < 70%RH, no condensation			100			
Resistance	Output - 😩	Test voltage: 500VDC			100			
1. 1. 1.	Input - output				2 x MOPP			
Isolation	Input - 😩				1 x MOPP			
level	Output - 😩				1 x MOPP			
Operating Ten	nperature				-40		+85	· °C
Storage Temperature					-40		+85	
Storage Humidity		Non-condensing		10		95	%RH	
Operating Humidity				20		90	76KH	
Power Derating		Operating	+45 ℃ to +85℃	Air cooling	2.0			%/℃

MORNSUN®

^{2. *}The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;

AC/DC 120W Enclosed Switching Power Supply MORNSUN®

LOF120-20Bxx-C Series




	temperature	+50°C to +85°C	10CFM				
	derating	-40℃ to -30℃	-40℃ to -30℃				
	Input voltage	85VAC-115VAC	Air cooling	1.0			9/ // // /
	derating	85VAC-100VAC	10CFM	2.0			%/VAC
Safety Standard	12V/15V/24V/27\	SV/24V/27V/36V/48V			IEC/UL62368-1, ES60601-1 safety approved & EN60335-1, EN61558-1, EN60601-1, EN62368-1 (Report) Design refer to IEC/EN/UL62368-1, EN60335-1, IEC/EN61558-1, GB4943.1, IEC/EN60601-1, ES60601-1(3.1 version), CAN/CSA-C22.2 No.60601-1:14-Edition 3, EN60601-1-2 Edition 4		
	54V			EN62368-1 (Report) Design refer to IEC/EN/UL62368-1, EN60335 IEC/EN61558-1, GB4943.1, IEC/EN60601-1, ES60601-1(3.1version), CAN/CSA-C22.2 No.60601-1:14-Edition 3, EN60601-1-2 Edition			01-1 <i>,</i> 2.2
Safety Class					n PE and mu nout PE)	st be conne	cted)/
MTBF	MIL-HDBK-217F@2	25 ℃		>300,000 h			
Warranty	Ambient temper	ature: <50°C	5 years				


Mechanical Specifications					
Case Material	Metal (AL1100, SUS304)				
Dimensions 80.0 x 62.0 x 40.0mm					
Weight 180g (Typ.)					
Cooling Method* Air cooling / 10CFM					
Note: *Cooling method and power derating refer to typical characteristic curves.					

Electromagnetic	Compatibility (EMC)					
	CE	CISPR32/EN55032	CLASS B			
Emissions*	RE	CISPR32/EN55032	(Category I, CLASS B; Category II, CLASS A)			
ETTISSIOTIS	Harmonic current	IEC/EN61000-3-2	2 CLASS A and CLASS D			
	Voltage flicker	IEC/EN61000-3-3				
	ESD	IEC/EN 61000-4-2	Contact ±8KV/Air ±15KV	perf. Criteria A		
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A		
	EFT	IEC/EN 61000-4-4	±2KV	perf. Criteria A		
Immunity	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A		
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A		
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%,70%	perf. Criteria B		

Note: 1.*The power supply should be considered as a part of the components in the system. The power supply must be combined with the terminal equipment for electromagnetic compatibility confirmation;

Product Characteristic Curve





Note: With an AC input voltage between 85 - 115VAC and a DC input between 120 - 160VDC the output power must be derated as per the temperature derating curves.


MORNSUN®


^{*}Category I products with PE (which must be connected), category II products without PE.

AC/DC 120W Enclosed Switching Power Supply MORNSUN®


LOF120-20Bxx-C Series



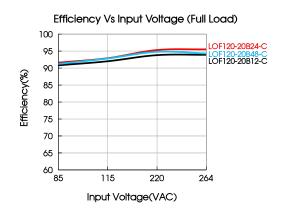

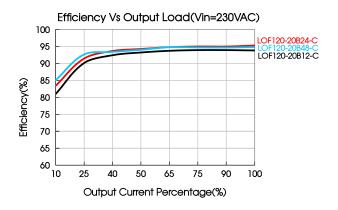


Dimensions and Recommended Layout

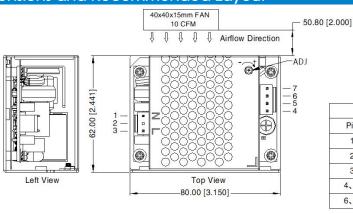






		Pin-Out			
Pin	Mark	Product Connector	Customer Connector		
1	AC(N)	JST B3P-VH	Housing: JST VHR		
2	NC	or equivalent Co	Contact: JST SVH-21T-P1.1		
3	AC(L)		or equivalent		
4, 5	-Vo	JST B4P-VH	Housing: JST VHR		
6, 7	+Vo	or equivalent	Contact: JST SVH-21T-P1.1 or equivalent		

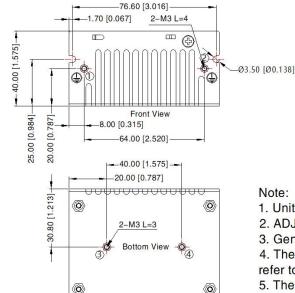

Position	Screw Spec.	L(max)	Torque(max)
①-②	M3	4mm	0.4N·m
3-4	МЗ	3mm	0.4N·m



Note:

- 1. Unit: mm[inch]
- 2. ADJ: Output adjustable resistor
- 3. General tolerances: $\pm 1.00[\pm 0.039]$
- 4. The layout of the device is for reference only, please refer to the actual product
- 5. The out case needs to be connected to the earth of system when the terminal

AC/DC 120W Enclosed Switching Power Supply MORNSUN® LOF120-20Bxx-C Series



Note:

- 1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220152;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% RH with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product 4. performance and reliability;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC"; 6.
- The out case needs to be connected to PE $(\stackrel{\triangle}{=})$ of system when the terminal equipment in operating; 7.
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by 8. qualified units;
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/"ATTENTION: Double pôle/fusible sur le neutre. Débrancher lalimentation avant lentretien;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China Tel: 86-20-38601850 Fax: 86-20-38601272 F-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN®