

10W, AC-DC converter



FEATURES

- Universal Input : 85 - 264VAC/100 - 370VDC
- Operating temperature range: -40°C to +85°C
- High isolation voltage up to 4K VAC
- Regulated output, Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case, meets UL94V-0
- EMI performance meets CISPR32 / EN55032 CLASS B
- IEC62368, UL62368, EN62368 approval

LHE10-20Bxx series —a compact size power converter offered by Mornsun. It features universal input voltage, taking both DC and AC input voltage, low power consumption, high efficiency, high reliability, safer isolation. It offers good EMC performance, which meet IEC/EN61000-4, CISPR32/EN55032, UL62368 and EN62368 standards, and it's widely used in industrial, office and civil applications. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Selection Guide

Certification	Part No.*	Output Power	Nominal Output Voltage and Current	Efficiency (230VAC, %/Typ.)	Max. Capacitive Load(μF)
UL/CE/CB	LHE10-20B03	10W	3.3V/2000mA	70	27000
	LHE10-20B05		5V/2000mA	76	9500
	LHE10-20B09		9V/1100mA	78	3600
	LHE10-20B12		12V/900mA	80	2400
	LHE10-20B15		15V/700mA	81	1200
	LHE10-20B24		24V/450mA	82	470

Note:*Part No. with suffix of "A2" means chassis mounting and suffix of "A4" means DIN-Rail mounting (e.g. LHE10-20B03A2 means chassis mounting; LHE10-20B03A4 means DIN-Rail mounting)

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	100	--	370	VDC
Input frequency		47	--	63	Hz
Input current	115VAC	--	--	0.26	A
	230VAC	--	--	0.16	
Inrush current	115VAC	--	13	--	
	230VAC	--	23	--	
Leakage current		0.3mA RMS typ./230VAC/50Hz			
Recommended External Input Fuse		2A/250V, slow fusing, necessary			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V output	--	±3	--	%
	Other output	--	±2	--	
Line Regulation	Full load	--	±0.5	--	
Load Regulation	0%-100% load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-peak value)	--	50	100	mV
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Continuous, self-recovery			

Over-current Protection		≥ 110% Io self-recovery			
Over-voltage Protection	3.3 / 5VDC Output	≤ 7.5VDC			
	9VDC Output	≤ 15VDC			
	12 / 15VDC Output	≤ 20VDC			
	24VDC Output	≤ 30VDC			
Min. Load		0	--	--	%
Hold-up Time	115VAC input	--	15	--	ms
	230VAC input	--	80	--	

Note: * Ripple and noise are measured by "parallel cable" method, please see AC-DC Converter Application Notes for specific operation.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output	4000	--	--	VAC
	Input-PE	2500	--	--	
Operating Temperature		-40	--	+85	°C
Storage Temperature		-40	--	+105	
Storage Humidity		--	--	95	%RH
Welding Temperature	Wave-soldering	260 ± 5°C; time: 5 - 10s			
	Manual-welding	360 ± 10°C; time: 3 - 5s			
Switching Frequency		--	100	--	kHz
Power Derating	-40°C to -25°C	4.0	--	--	% / °C
	+55°C to +70°C	3.3	--	--	
	+70°C to +85°C	2.7	--	--	
	85 - 100VAC	1.67	--	--	% / VAC
	240 - 264VAC	0.83	--	--	
Safety Standard		IEC62368/EN62368/UL62368			
Safety Certification		IEC62368/EN62368/UL62368			
Safety Class		CLASS I			
MTBF		MIL-HDBK-217F@25°C > 300,000 h			



Physical Specifications

Casing Material		Black flame-retardant and heat-resistant plastic (UL94V-0)
Dimension	Horizontal package	55.00*45.00*21.00 mm
	A2 chassis mounting	96.10*54.00*29.50 mm
	A4 Din-Rail mounting	96.10*54.00*34.10 mm
Weight	Horizontal package	75g (Typ.)
	A2 chassis mounting	125g(Typ.)
	A4 Din-Rail mounting	165g(Typ.)
Cooling method		Free air convection



EMC Specifications

EMI	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
EMS	ESD	IEC/EN 61000-4-2	Contact $\pm 6KV$ / Air $\pm 8KV$	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2KV$	perf. Criteria B
		IEC/EN61000-4-4	$\pm 4KV$ (See Fig. 5 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 1KV$ /line to ground $\pm 2KV$	perf. Criteria B
IEC/EN61000-4-5		line to line $\pm 2KV$ /line to ground $\pm 4KV$ (See Fig. 5 for recommended circuit)	perf. Criteria B	
EMS	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations	IEC/EN61000-4-11	0%,70%	perf. Criteria B

Product Characteristic Curve

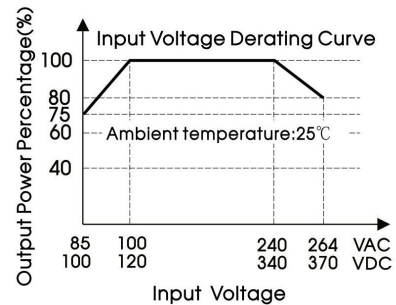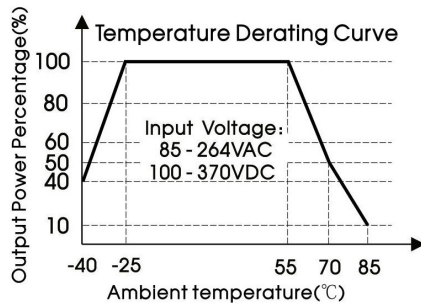

Note: ①When input 85-100VAC/240 - 264VAC/100-120VDC/340 - 370VDC, it need to be voltage derated on basis of temperature derating;
②This product is suitable for use in natural air cooling environments, if in a closed environment, please contact our company's FAE.

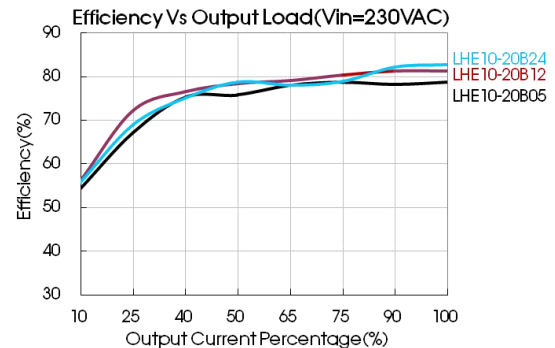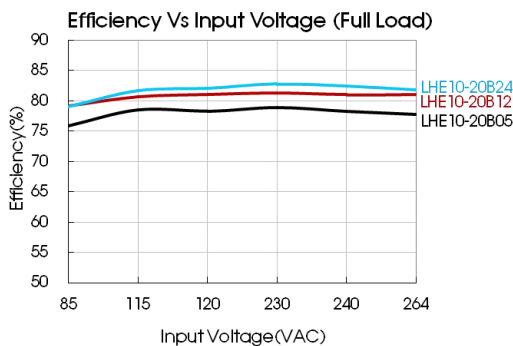

Design Reference

1. Typical application circuit

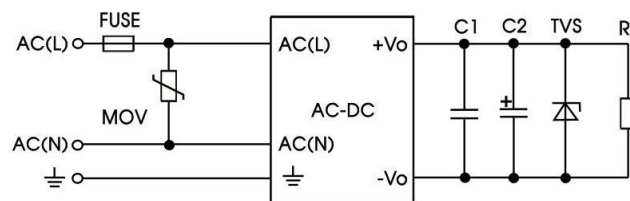


Fig. 1

Model	C2(μF)	FUSE	MOV	TVS
LHE10-20B03	470	2A/250V slow fusing, necessary	S14K300	SMBJ7.0A
LHE10-20B05	330			SMBJ7.0A
LHE10-20B09	120			SMBJ12A
LHE10-20B12	120			SMBJ20A
LHE10-20B15	120			SMBJ20A
LHE10-20B24	68			SMBJ30A

Note:
Output filtering capacitors C2 is electrolytic capacitors, it is recommended to use high frequency and low impedance electrolytic capacitor. For capacitance and current of capacitor please refer to manufacture's datasheet. Capacitor voltage reduced to at least 80%. C1 is ceramic capacitors, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails.

2. EMC solution-recommended circuit


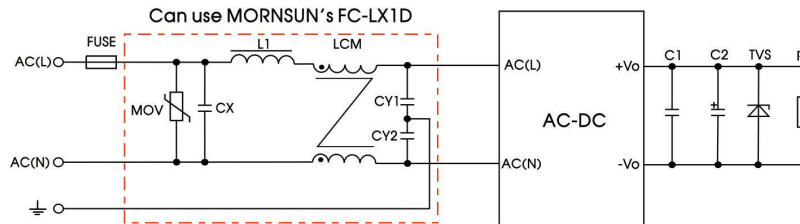


Fig 2: EMC Recommended circuit with higher requirements

Element model	Recommended value
MOV	S14K300
CY1 , CY2	1000pF/400VAC
CX	0.1μF/275VAC
LCM	10mH, recommended to use MORN SUN's FL2D-Z5-103
L1	4.7μH/2A
FC-LX1D	2KV/4KV EMC filter
FUSE	2A/250V slow fusing, necessary


3. For more information Please find the application note on www.mornsun-power.com

Dimensions and Recommended Layout

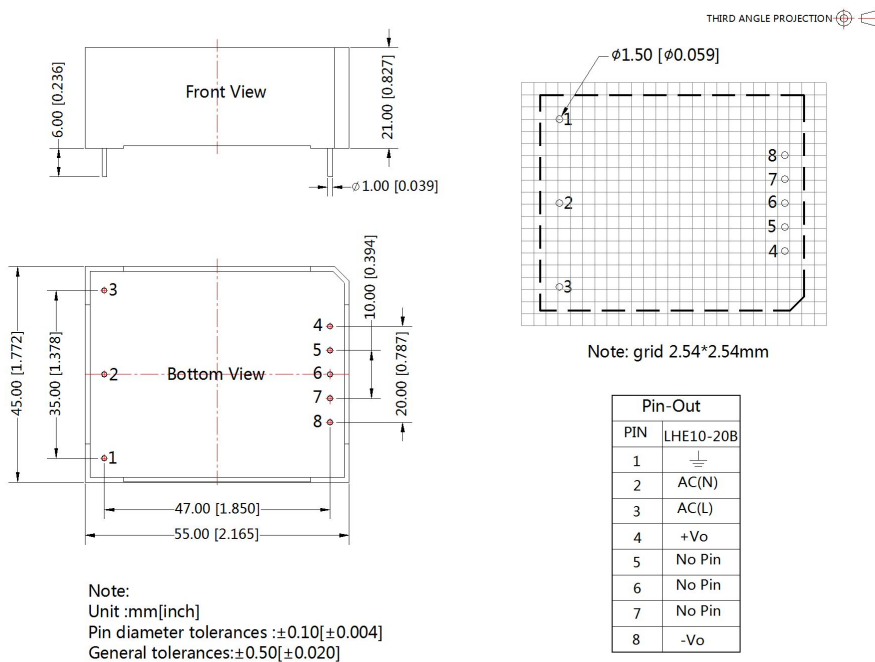


A2 Dimensions

THIRD ANGLE PROJECTION

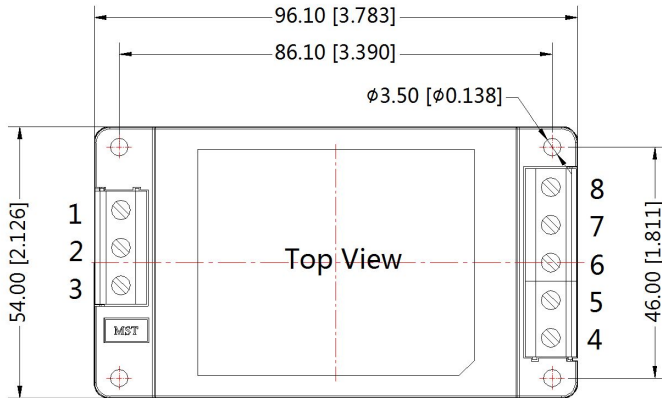


Pin-Out	
Pin	Function
1	\perp
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

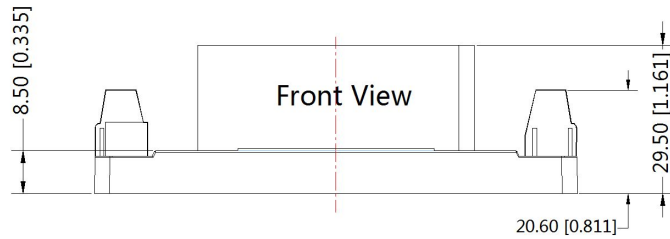

Note:
 Unit:mm[inch]
 Wire range : 24-12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.0 [± 0.040]

A4 Dimensions

THIRD ANGLE PROJECTION

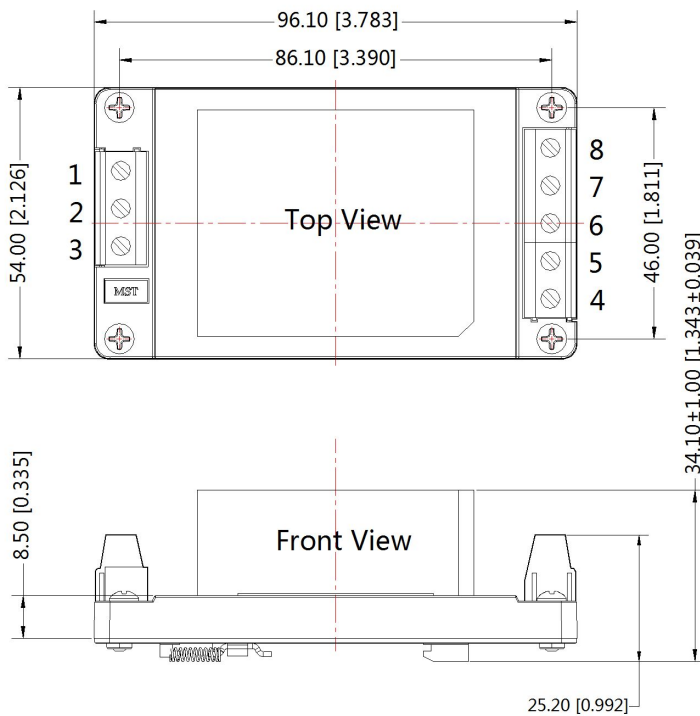

Pin-Out	
Pin	Function
1	\perp
2	AC(N)
3	AC(L)
4	+Vo
5	NC
6	NC
7	NC
8	-Vo

Note:
 Unit:mm[inch]
 Installed on DIN rail TS35,rail needs to connect safety ground
 Wire range : 24-12 AWG
 Tightening torque: Max 0.4 N·m
 General tolerances: ± 1.0 [± 0.040]

Note:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number: 58220006(Horizontal package); 58220010 (A2/A4 package);
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: sales@mornsun.cn www.mornsun-power.com