



FEATURES

- Universal 85 - 305VAC or 120 - 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage, over-temperature protection
- DIN rail TS-35/7.5 or 15 mountable
- Suitable for small chassis and narrow space installation
- Safety according to UL61010, IEC/EN/UL/BS EN62368, EN60335, EN61558, GB4943

LI120-23BxxR3 is Mornsun AC-DC converter series featuring a cost-effective, energy efficient green power supply solution for standard DIN-rail mounting. The products offer a high level of stability and immunity to noise for industrial control equipment, machinery, and other industrial equipment in a variety of harsh environments. These light weight AC-DC converters have an extremely compact design and the standard rail installation for space saving. With good EMC performance, compliant with international UL61010, IEC/EN/UL/BS EN62368, EN60335, EN61558, GB4943 standards for EMC and safety.

Selection Guide

Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
LI120-23B24R3	120	24V/5A	24-28V	90	4000
LI120-23B48R3		48V/2.5A	48-53V	91.5	1000

Note: *Use suffix "Q" for conformal coating.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	305	VAC
	DC input	120	--	430	VDC
Input Voltage Frequency		47	--	63	Hz
Input Current	115VAC	--	--	2.7	A
	230VAC	--	--	1.6	
Inrush Current	115VAC	Cold start	--	35	--
	230VAC		--	65	
Leakage Current	277VAC	<1mA			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	--	±1.0	--	%
Line Regulation	Rated load	--	±0.5	--	
Load Regulation	0% - 100% load	--	±1.0	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	24V	--	120	
		48V	--	150	--
Temperature Coefficient		--	±0.03	--	%/°C
Minimum Load		0	--	--	%

Stand-by Power Consumption	115VAC	--	--	--	W
	230VAC	--	1.0	1.5	
Hold-up Time	115VAC	--	8	--	ms
	230VAC	--	16	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Constant current mode, continuous, self-recovery		
Over-current Protection	230VAC, rated load		>105%Io, self-recovery		
Over-voltage Protection	24V		≤33VDC (Hiccup, self-recovery)		
	48V		≤63VDC (Hiccup, self-recovery)		
Over-temperature Protection	230VAC, rated load, 60°C		Output voltage turn off, self-recovery after the temperature drops		
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.					

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Isolation Test	Input - ⊕	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC	
	Input - output		4000	--	--		
	Output - ⊕		500	--	--		
Insulation Resistance	Input - ⊕	At 500VDC	50	--	--	MΩ	
	Input - output		50	--	--		
	Output - ⊕		50	--	--		
Operating Temperature			-40	--	+85	°C	
Storage Temperature			-40	--	+85		
Operating Humidity	Non-condensing		10	--	95	%RH	
Storage Humidity			20	--	95		
Switching Frequency			--	150	--	kHz	
Power Derating	Operating temperature derating	-40°C to -30°C	5	--	--	% / °C	
		+45°C to +85°C	115VAC	2.15	--		--
		+50°C to +85°C	230VAC	2.5	--		--
	Input voltage derating	85VAC - 110VAC	0.8	--	--	% / VAC	
277VAC - 305VAC	0.71	--	--				
Safety Standard			Design refer to UL61010-1, EN60335-1, GB4943.1, IEC/EN/UL/BS EN62368-1, EN61558-1				
Safety Class			CLASS I				
MTBF	MIL-HDBK-217F@25°C		≥300,000 h				

Mechanical Specifications



Case Material	Metal (AL1100, SGCC)
Dimensions	125.0mm x 87.5mm x 32.0mm
Weight	400g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A

EFT	IEC/EN 61000-4-4	±2KV	perf. Criteria A
Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria B
CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B


Product Characteristic Curve

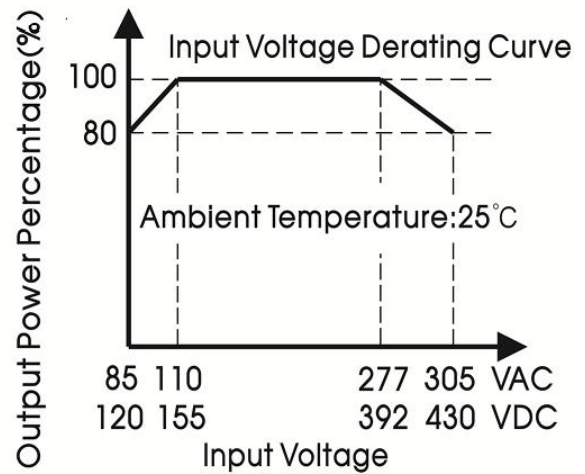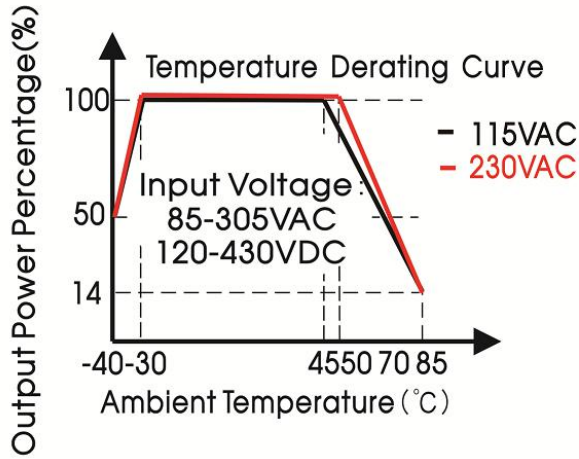

- Note: 1. With an AC input voltage between 85 - 110VAC/277 - 305VAC and a DC input between 120 - 155VDC/392 - 430VDC the output power must be derated as per the temperature derating curves;
2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

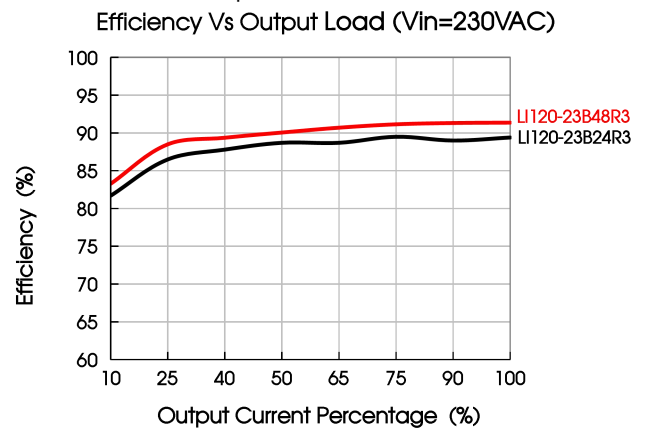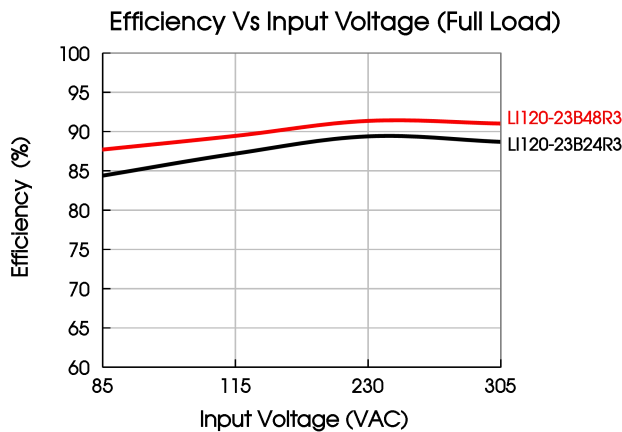

Dimensions and Recommended Layout

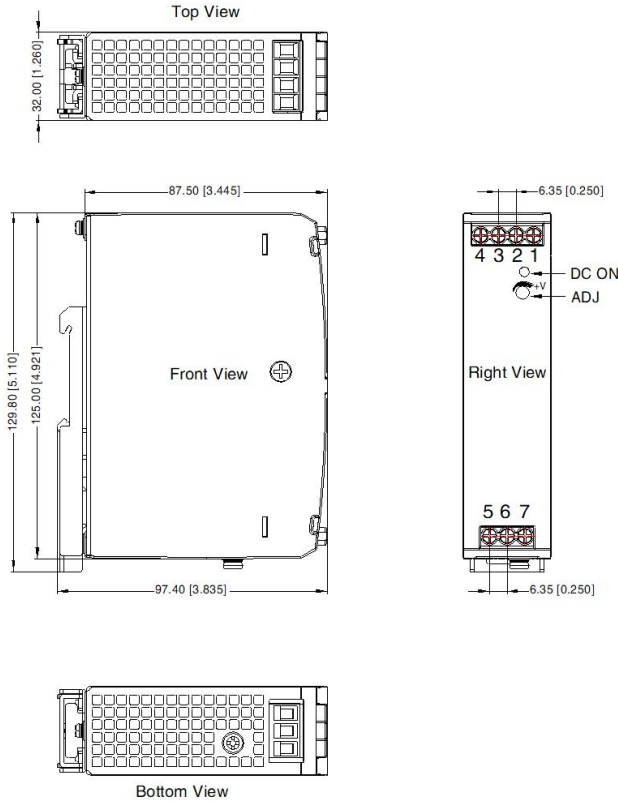

THIRD ANGLE PROJECTION

Pin-Out	
Pin	Mark
1	-Vo
2	-Vo
3	+Vo
4	+Vo
5	AC(N)
6	AC(L)
7	

Note:
Unit: mm[inch]
ADJ: Output adjustable resistor
Wire range: 26-10 AWG
Tightening torque: Max 0.79N · m
Mounting rail: TS35, rail needs to connect safety ground
General tolerances: ± 1.00[± 0.039]

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220214;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75% RH with nominal input voltage and rated output load;
- The room temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE () of system when the terminal equipment in operating;
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com