


30W isolated DC-DC converter with Ultra-wide Input and Regulated Dual/Single Output



FEATURES

- Ultra-wide 4:1 input voltage range
- High efficiency up to 90% with full load and up to 82% with 5% load
- No-load power consumption as low as 0.14W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short circuit, over-voltage, over-current protection
- Operating ambient temperature range -40°C to +80°C
- CISPR32/EN55032 CLASS A EMI compliant without external components
- Six-sided metal shielded package
- Input Reverse Polarity Protection available with Chassis (A2S) or 35mm DIN-Rail mounting (A4S) version
- IEC60950, UL60950, EN60950 Approval

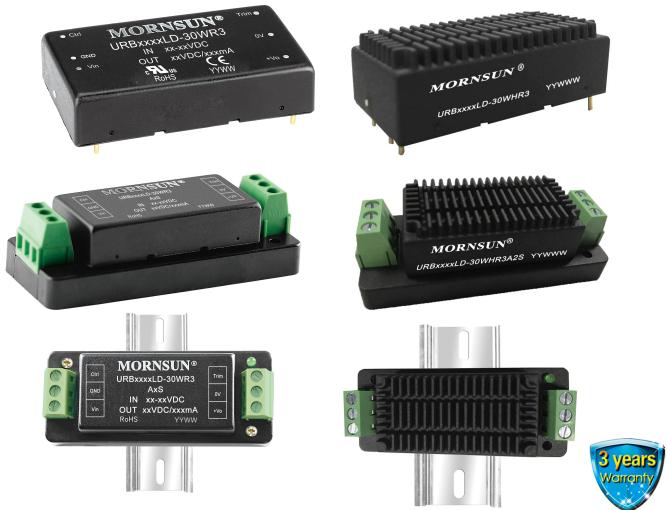

us Patent Protection RoHS

URA_LD-30WR3 & URB_LD-30WR3 series of isolated 30W DC-DC converter products with an ultra-wide 4:1 input voltage and feature efficiencies of up to 90%, input to output isolation is tested with 1500VDC and the converters safely operate ambient temperature of -40°C to +80°C, input under-voltage protection, output short-circuit, over-voltage, over-current protection. They meet CLASS A of CISPR32/EN55032 EMI standards without external components, optional packages are offered for chassis or DIN-rail mounting (A2S, A4S), adding additional input reverse polarity protection and they are widely used in applications such as data transmission device, battery power supply device, tele-communication device, distributed power supply system, hybrid module system, remote control system, industrial robot fields.

Selection Guide

Certification	Part No. ^①	Input Voltage (VDC)		Output		Full Load Efficiency ^④ (%) Min./Typ.	Max. Capacitive Load(μF) ^⑤
		Nominal ^② (Range)	Max. ^③	Voltage (VDC)	Current (mA) Max./Min.		
UL/CE/CB	URB2403LD-30WR3	24 (9-36)	40	3.3	6000/0	83/85	10000
	URB2405LD-30WR3			5	6000/0	84/86	10000
	URB2409LD-30WR3			9	3333/0	86/88	4700
	URB2412LD-30WR3			12	2500/0	88/90	2700
	URB2415LD-30WR3			15	2000/0	88/90	1680
	URB2424LD-30WR3			24	1250/0	88/90	680
CE	URA2405LD-30WR3	48 (18-75)	80	±5	±3000/0	84/86	2000
	URA2412LD-30WR3			±12	±1250/0	87/89	1250
	URA2415LD-30WR3			±15	±1000/0	87/89	680
	URA2424LD-30WR3			±24	±625/0	87/89	470
	URB4803LD-30WR3			3.3	6000/0	84/86	10000
UL/CE/CB	URB4805LD-30WR3	48 (18-75)	80	5	6000/0	85/87	10000
	URB4812LD-30WR3			12	2500/0	86/88	2700
	URB4815LD-30WR3			15	2000/0	87/89	1680
	URB4824LD-30WR3			24	1250/0	85/87	680
	URA4805LD-30WR3			±5	±3000/0	84/86	2000
CE	URA4812LD-30WR3			±12	±1250/0	86/88	1250
	URA4815LD-30WR3			±15	±1000/0	86/88	680

Notes: ①Use "H" suffix for heat sink mounting, "A2S" suffix for chassis mounting and "A4S" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;

②Minimum input voltage and start-up voltage are increased by 1V for all models with A2S and A4S suffixes because of the input reverse polarity function;

③Absolute maximum stress rating without damage (not recommended);

④Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit;

⑤The specified maximum capacitive load value for positive and negative output is identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage	3.3V output	--	970/60	993/100
		5V output	--	1454/60	1488/100
		Others	--	1388/6	1488/12
	48VDC nominal input series, nominal input voltage	3.3V output	--	474/20	485/30
		5V output	--	710/20	726/35
		Others	--	702/5	744/10
Reflected Ripple Current	Nominal input voltage	--	40	--	
Surge Voltage (1sec. max.)	24VDC nominal input series	-0.7	--	50	
	48VDC nominal input series	-0.7	--	100	
Start-up Voltage	24VDC nominal input series	--	--	9	
	48VDC nominal input series	--	--	18	
Shut-down Voltage	24VDC nominal input series	5.5	6.5	--	
	48VDC nominal input series	12.0	15.5	--	
Start-up Time	Nominal input voltage & constant resistance load	--	10	--	ms
Input Filter				PI filter	
Hot Plug				Unavailable	
Ctrl *	Module on			Ctrl pin open or pulled high (3.5-12VDC)	
	Module off			Ctrl pin pulled low to GND (0-1.2VDC)	
	Input current when off	--	5	8	mA

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load	--	± 1	± 3	%
	0%-5% load	--	± 1	± 5	
Linear Regulation	Input voltage variation from low to high at full load	Positive output	--	± 0.2	± 0.5
		Negative output	--	± 0.5	± 1
Load Regulation ^①	5%-100% load	Positive output	--	± 0.5	± 1
		Negative output	--	± 0.5	± 1.5
Cross Regulation	Dual output with Positive output at 50% load and Negative output from 10%-100% load	--	--	± 5	
Transient Recovery Time	25% load step change, nominal input voltage	--	300	500	μs
Transient Response Deviation		3.3V/5V/ ± 5 V output	--	± 5	± 8
Temperature Coefficient		--	± 3	± 5	%
Ripple & Noise ^②	20MHz bandwidth, nominal input voltage, 100% load	Single output	--	50	100
		Dual output	--	50	150
Trim		--	± 10	--	
Over-voltage Protection		110	--	160	%Vo
Over-current Protection	Input voltage range	110	--	190	%Io
Short-circuit Protection				Hiccup, continuous, self-recovery	

Note: ① Load regulation for 0%-100% load is $\pm 5\%$;

② The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC/60sec	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	2000	--	pF
Operating Temperature	See Fig. 1, Fig. 2, Fig. 3 and Fig. 4	-40	--	+80	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		10-55Hz, 2G, 30 Min. along X, Y and Z			
Switching Frequency *	PWM mode	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

Note: * Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications

Case Material	Aluminum alloy		
Dimensions	Horizontal package (without heat sink)		50.80 x 25.40 x 11.80 mm
	Horizontal package (with heat sink)		51.40 x 26.20 x 16.50 mm
	A2S chassis mounting (without heat sink)		76.00 x 31.50 x 21.20 mm
	A2S chassis mounting (with heat sink)		76.00 x 31.50 x 25.30 mm
	A4S Din-rail mounting (without heat sink)		76.00 x 31.50 x 25.80 mm
	A4S Din-rail mounting (with heat sink)		76.00 x 31.50 x 29.90 mm
Weight	without heat sink	Horizontal package/A2S chassis mounting/A4S Din-rail mounting	27.8g/52.0g/72.0g(Typ.)
	with heat sink	Horizontal package/A2S chassis mounting/A4S Din-rail mounting	37.0g/60.0g/80.0g(Typ.)
Cooling Method	Free air convection		

Electromagnetic Compatibility (EMC)

Emissions	CE	Single output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit)
		Dual output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit)
	RE	Single output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.6-② for recommended circuit)
		Dual output	CISPR32/EN55032	CLASS A (without external components)/ CLASS B (see Fig.7-② for recommended circuit)
Immunity	ESD		IEC/EN61000-4-2	Contact ±4KV perf. Criteria B
	RS		IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	Single output	IEC/EN61000-4-4	±2KV (see Fig.6-① for recommended circuit) perf. Criteria B
		Dual output	IEC/EN61000-4-4	±2KV (see Fig.7-① for recommended circuit) perf. Criteria B
	Surge	Single output	IEC/EN61000-4-5	line to line ±2KV (see Fig.6-① for recommended circuit) perf. Criteria B
		Dual output	IEC/EN61000-4-5	line to line ±2KV (see Fig.7-① for recommended circuit) perf. Criteria B
	CS	Single output	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A
		Dual output	IEC/EN61000-4-6	10Vr.m.s perf. Criteria A

Typical Characteristic Curves

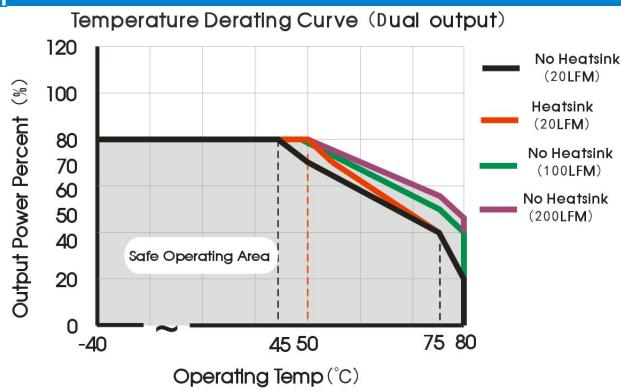


Fig. 1

Apply model: URA2405LD-30W(H)R3 (9-18V input voltage),
URA2424LD-30W(H)R3 (9-18V input voltage),
URA4805LD-30W(H)R3 (18-36V input voltage)

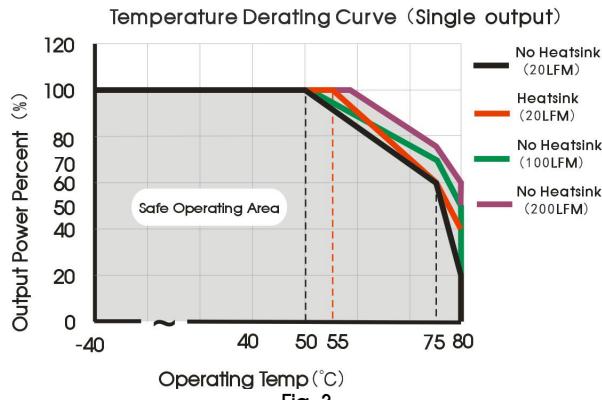


Fig. 3

Apply model: URB2403LD-30W(H)R3, URB2405LD-30W(H)R3,
URB4803LD-30W(H)R3, URB4805LD-30W(H)R3

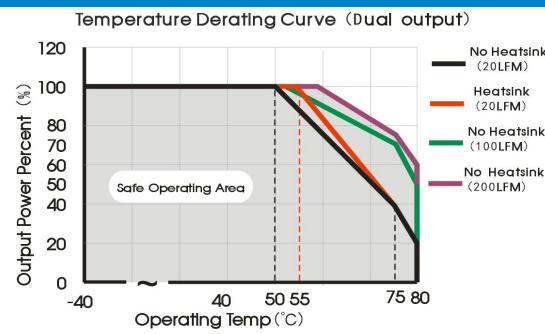


Fig. 2

Apply model: URA2405LD-30W(H)R3 (18-36V input voltage),
URA2424LD-30W(H)R3 (18-36V input voltage),
URA4805LD-30W(H)R3 (36-75V input voltage),
URA2412LD-30W(H)R3, URA2415LD-30W(H)R3,
URA4812LD-30W(H)R3, URA4815LD-30W(H)R3





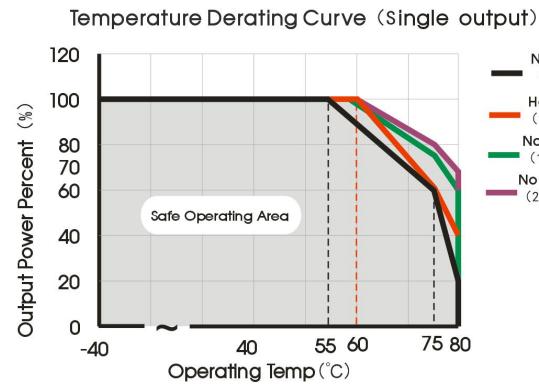


Fig. 4

Apply model: URB2409LD-30W(H)R3, URB2412LD-30W(H)R3,
URB2415LD-30W(H)R3, URB2424LD-30W(H)R3,
URB4812LD-30W(H)R3, URB4815LD-30W(H)R3,
URB4824LD-30W(H)R3

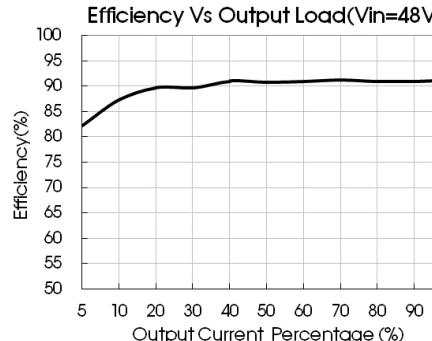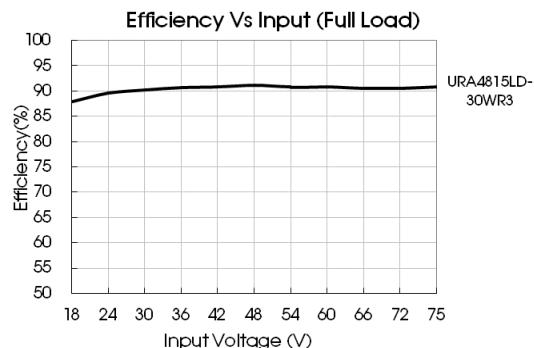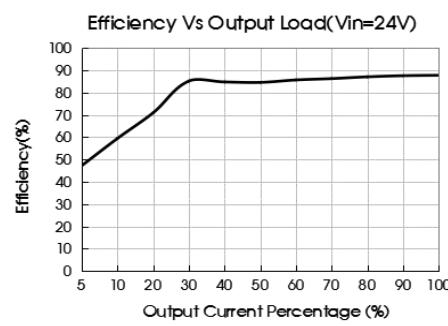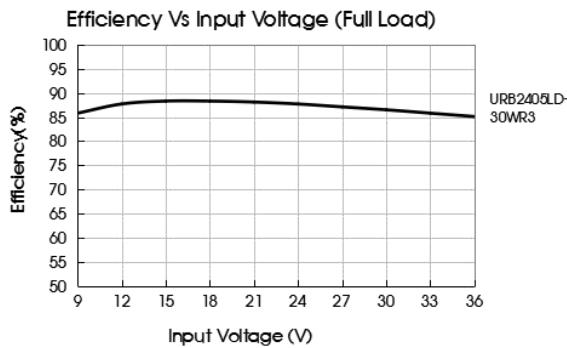

Design Reference

1. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

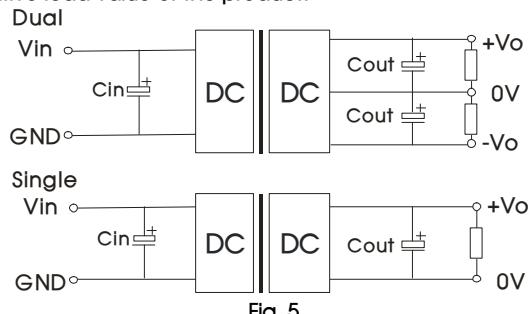


Fig. 5

2. EMC compliance circuit

Single output

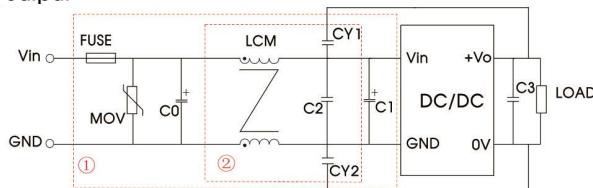


Fig. 6

Notes: Part ① in the Fig. 6 is used for EMC test and part ② for EMI test

Single output voltage (VDC)	C_{out} (μF)	C_{in} (μF)	Dual output voltage (VDC)	C_{out} (μF)	C_{in} (μF)
3.3/5/9	220	100	$\pm 5/\pm 12/\pm 15$	220	100
12/15/24	100		± 24	100	

Dual output

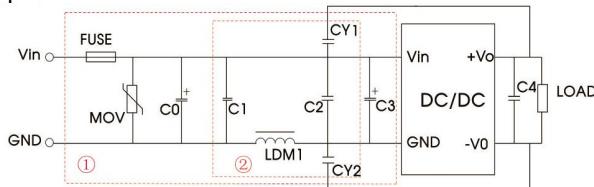


Fig. 7


Notes: Part ① in the Fig. 7 is used for EMC test and part ② for EMI test

Parameter description

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
MOV	S20K30	S14K60
C0	680 μF /50V	330 μF /100V
C1	330 μF /50V	330 μF /100V
C2	4.7 μF /50V	2.2 μF /100V
C3	Refer to the C_{out} in Fig.5	
LCM	1mH, recommended to use MORNSUN's FL2D-30-102	
CY1, CY2	1nF/2KV	

Model	Vin:24V	Vin:48V
FUSE	Choose according to actual input current	
MOV	S20K30	S14K60
C0	680 μF /50V	330 μF /100V
C1, C2	2.2 μF /50V	2.2 μF /100V
C3	330 μF /50V	330 μF /100V
C4	Refer to the C_{out} in Fig.5	
LDM1	3.3 μH	
CY1, CY2	2.2nF/400VAC Safety Y Capacitor	

3. Trim Function for Output Voltage Adjustment (open if unused)

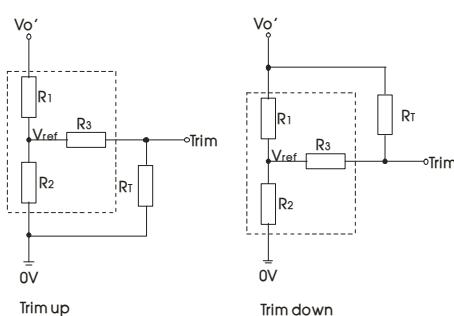

Calculating Trim resistor values:

$$\text{up: } R_T = \frac{\alpha R_2}{R_2 - \alpha} - R_3 \quad \alpha = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{\alpha R_1}{R_1 - \alpha} - R_3 \quad \alpha = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$


R_T = Trim Resistor value;
 α = self-defined parameter;
 $V_{o'}$ =desired output voltage.

TRIM resistor connection (dashed line shows internal resistor network)

Vout(VDC)	R1(KΩ)	R2(KΩ)	R3(KΩ)	Vref(V)
3.3	4.801	2.87	12.4	1.24
5	2.883	2.87	10	2.5
9	7.500	2.87	15	2.5
12	11.000	2.87	15	2.5
15	14.494	2.87	15	2.5
24	24.872	2.87	17.8	2.5


4. The products do not support parallel connection of their output
5. For additional information please refer to DC-DC converter application notes on www.mornsun-power.com

Horizontal Package (without heat sink) Dimensions and Recommended Layout

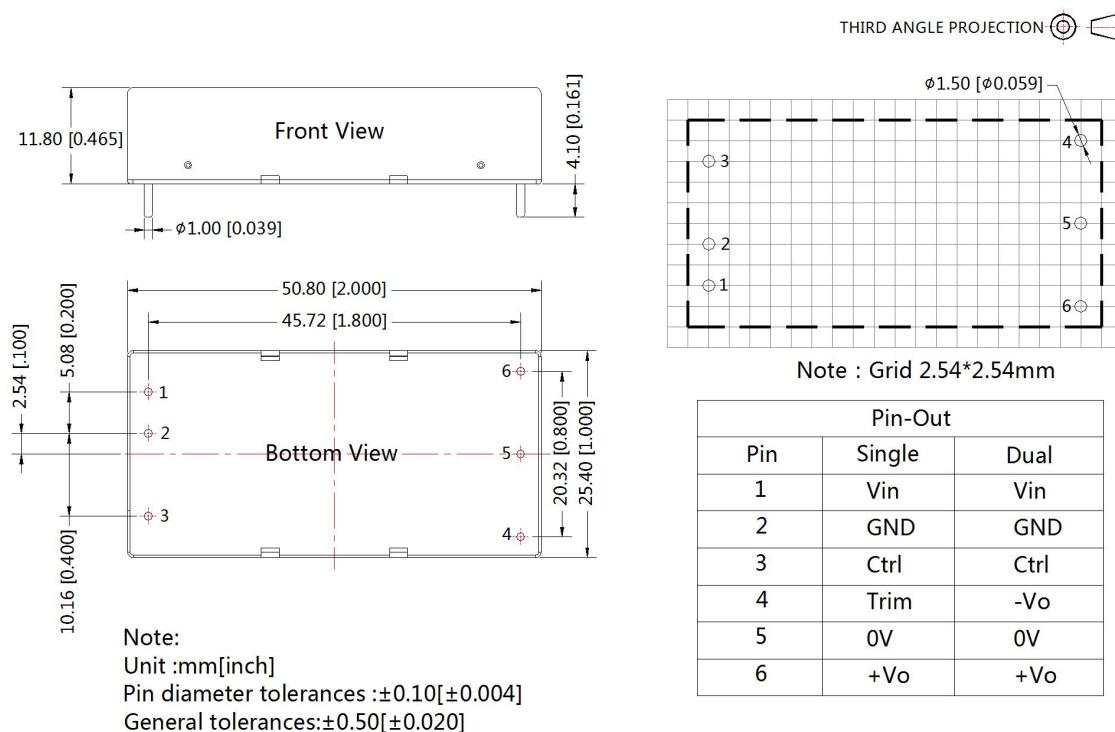

Horizontal Package (with heat sink) Dimensions

THIRD ANGLE PROJECTION

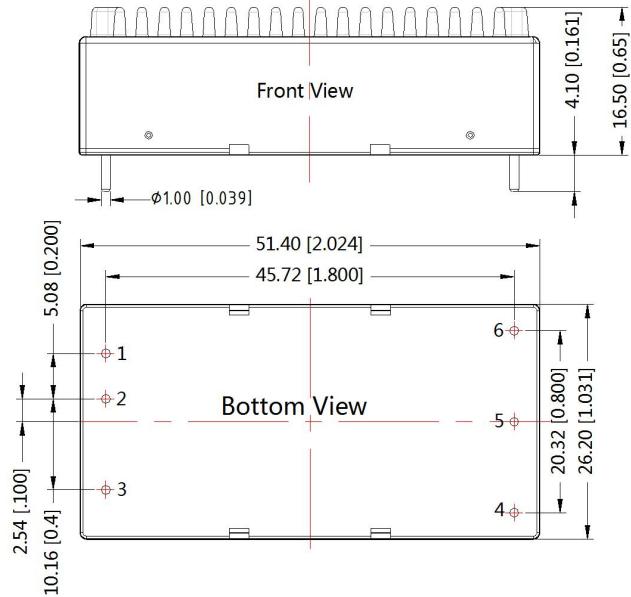


Pin-Out		
Pin	Single	Dual
1	Vin	Vin
2	GND	GND
3	Ctrl	Ctrl
4	Trim	-Vo
5	0V	0V
6	+Vo	+Vo

Note:
Unit: mm[inch]
General tolerances: ±0.50[±0.020]


URA_LD-30WR3A2S & URB_LD-30WR3A2S (without heat sink) Dimensions

THIRD ANGLE PROJECTION

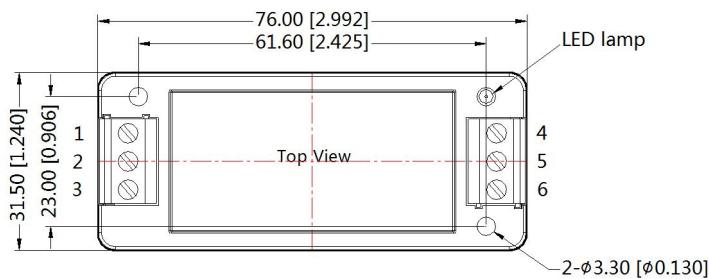


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	Trim	0V	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo

Note:
Unit: mm[inch]
Wire range: 24–12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ±0.50[±0.020]

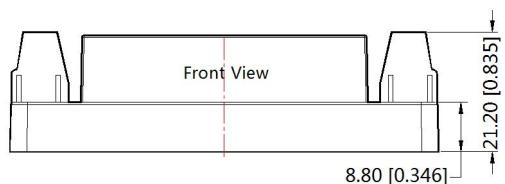


URA_LD-30WR3A2S & URB_LD-30WR3A2S(with heat sink) Dimensions

THIRD ANGLE PROJECTION

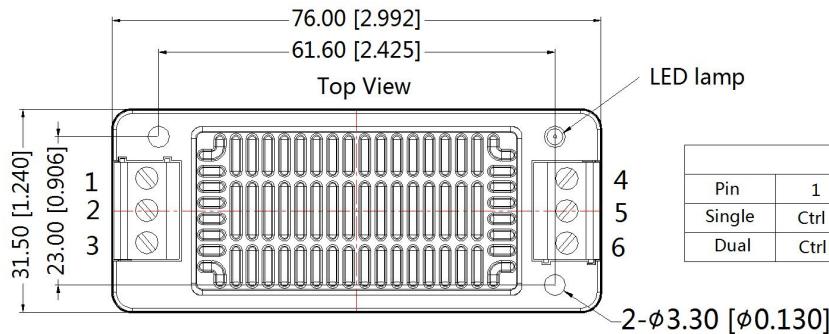


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	Trim	0V	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo

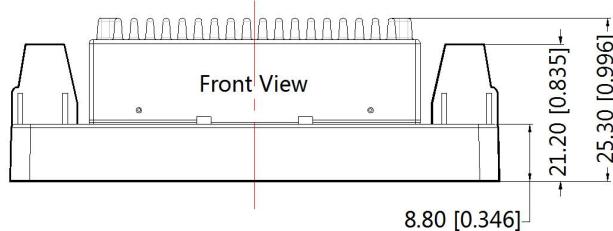


Note:
Unit: mm[inch]
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 0.50 [± 0.020]

URA_LD-30WR3A4S & URB_LD-30WR3A4S(without heat sink) Dimensions

THIRD ANGLE PROJECTION

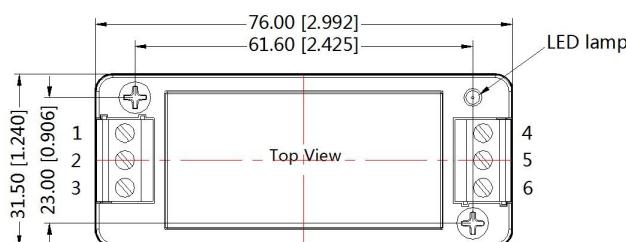


Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	Trim	0V	+Vo
Dual	Ctrl	GND	Vin	-Vo	0V	+Vo

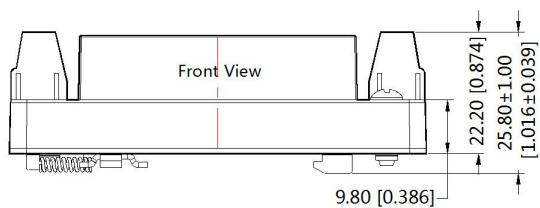

Note:
Unit: mm[inch]
Wire range: 24–12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ± 0.50 [± 0.020]

URA_LD-30WR3A4S & URB_LD-30WR3A4S(with heat sink) Dimensions

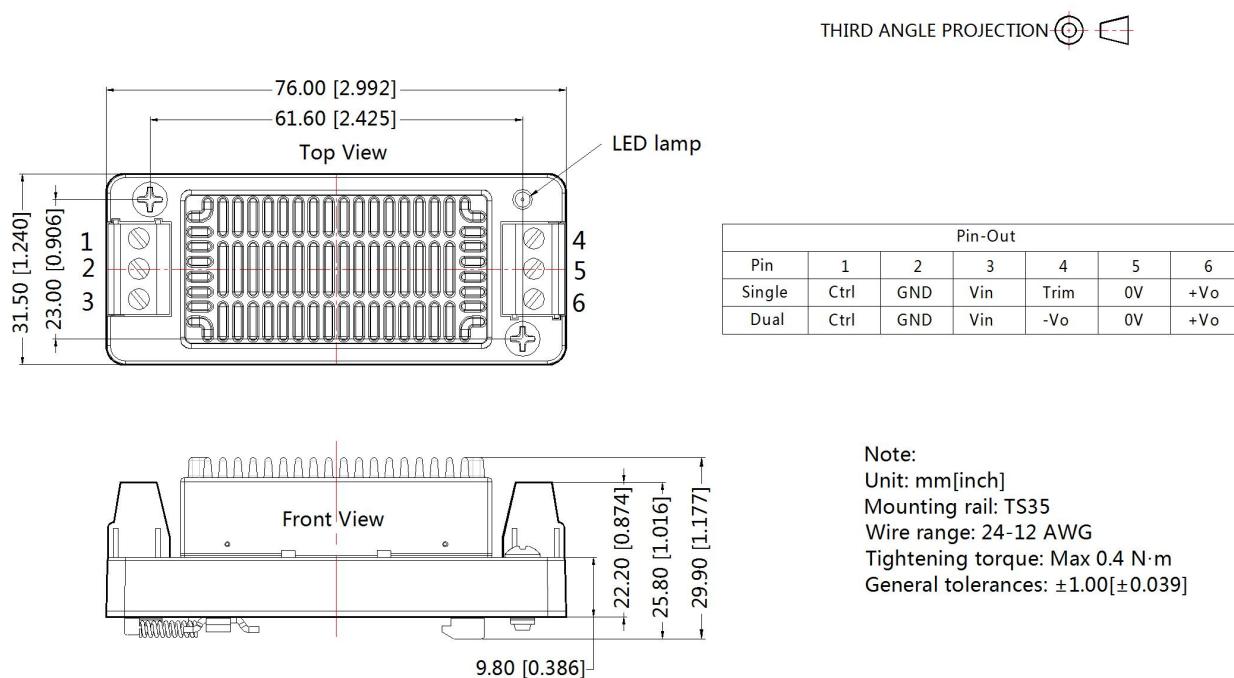

Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: ±1.00[±0.039]

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Horizontal Packaging Bag Number: 58200035(without heat sink), 58200051(with heat sink), A2S/A4S Packaging Bag Number: 58220022;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on Company's corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: sales@mornsun.cn www.mornsun-power.com

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.