


50W isolation DC-DC converter with ultra-wide , ultra-high 150-1500V DC input for Renewable Energy



RoHS

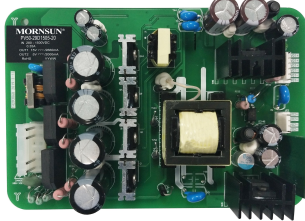

FEATURES

- Ultra-wide input voltage range of 150 - 1500VDC
- Operating ambient temperature range: -25°C to +65°C
- High I/O isolation test voltage of 4000VAC
- High efficiency, low ripple & noise
- High reliability, long service life
- Input reverse polarity and under-voltage protection, output short circuit, over-current and over-voltage protection
- Operating up to 5000m altitude

PV50-29D1505-20 is a regulated DC-DC converter with an ultra-wide and ultra-high DC input of 150-1500VDC, which design to meet standards of CSA-C22.2 No. 107.1, EN62109. The products feature high efficiency, high reliability, high insulation and a high level of safety protection. This type of power supply is widely used in renewable energy industries such SVG, photovoltaic power generation and high-voltage DC conversions. The converters provide multiple protection features and guarantee stable and safe operating environments even under abnormal working conditions. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

Selection Guide

Part No.	Output Power	Nominal Output Voltage and Current		Efficiency at 850VDC(%) Typ.	Capacitive Load (μF) Max.	
		Vo1/Io1	Vo2/Io2		Vo1	Vo2
PV50-29D1505-20	50W	15V/2.66A	5V/2A	78	1000	1000

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range		150	--	1500	VDC
Input Current	280VDC	--	350	--	mA
	850VDC	--	120	--	
	1500VDC	--	70	--	
Inrush Current	280VDC	--	50	--	A
	850VDC	--	150	--	
	1500VDC	--	250	--	
Under-voltage Protection	Lockout activation range	125	--	145	VDC
	Lockout deactivation range	130	--	150	
Maximum Transient Input Voltage	1600VDC	Duration: 1S, the product works normally, don't damage (The maximum transient input voltage interval is 15S)			
External Input Fuse		4A/1500VDC, slow-blow, required			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	All load range	Vo1	--	±2	--	
		Vo2	--	±2	--	
Line Regulation	Full load	Vo1	--	±1	--	%
		Vo2	--	±1	--	
Load Regulation	Rated input voltage, 10% - 100% load (balanced load)	Vo1	--	±2	--	
		Vo2	--	±2	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value), room temperature	Vo1	--	--	200	mV
		Vo2	--	--	200	
Temperature Coefficient		--	±0.02	--	%/°C	
Short Circuit Protection		Hiccup, continuous, self-recovery				
Over-current Protection		≥110%Io, hiccup, self-recovery				
Over-voltage Protection	Vo1	≤18VDC (Output voltage clamp or turn off)				
	Vo2	≤6VDC (Output voltage clamp or turn off)				

Minimum Load	Vo1	10	--	--	%
	Vo2	10	--	--	
Start-up Delay Time**	150 - 1500VDC	--	--	2	s

Note: * The "Tip and barrel method" is used for ripple and noise test, please refer to PV Converter Application Notes for specific information.

** Test condition for startup delay time: full input voltage range, full output load range (At room temperature, the cooling-time between input power-off and power-on again is greater than 2s.)

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Isolation Test	Input-output	Electric Strength Test for 1min, leakage current $\leq 10\text{mA}$	4000	--	--	VAC	
	Vo1-Vo2		2500	--	--		
Insulation Resistance	500VDC		$\geq 50 \times 10^6$			Ω	
Operating Temperature			-25	--	+65	$^{\circ}\text{C}$	
Storage Temperature			-40	--	+85		
Storage Humidity			--	--	95	%RH	
Power Derating	-25 $^{\circ}\text{C}$ to 0 $^{\circ}\text{C}$	150VDC - 280VDC	1.60	--	--	%/ $^{\circ}\text{C}$	
	-25 $^{\circ}\text{C}$ to 0 $^{\circ}\text{C}$	280VDC - 1500VDC	1.00	--	--		
	+50 $^{\circ}\text{C}$ to +65 $^{\circ}\text{C}$		2.67	--	--		
		150 - 280VDC		0.38	--	--	%/VDC
		1400 - 1500VDC		0.20	--	--	
		2000m - 5000m		13.3	--	--	%/Km
Safety Standard			CSA-C22.2 No.107.1, EN62109				
Switching Frequency			--	65	--	kHz	
Altitude			--	--	5000	m	
MTBF			MIL-HDBK-217F@25 $^{\circ}\text{C}$ $\geq 300,000$ h				



Mechanical Specifications



Dimensions	150.00 x 100.00 x 38.70mm
Weight	250g (Typ.)
Cooling method	Free air convection

Electromagnetic Compatibility (EMC)



Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$ /Air $\pm 8\text{KV}$	Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s (See Fig. 2 for recommended circuit)	perf. Criteria A

Product Characteristic Curve

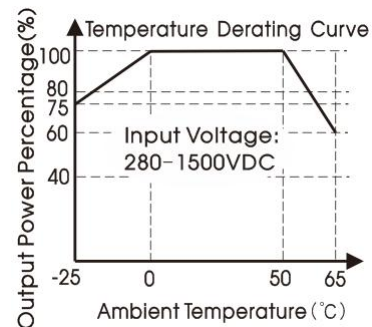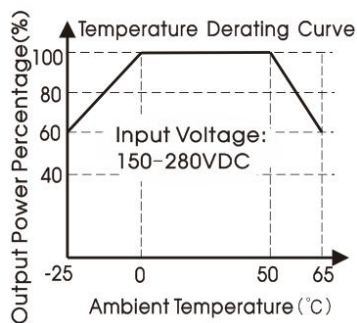

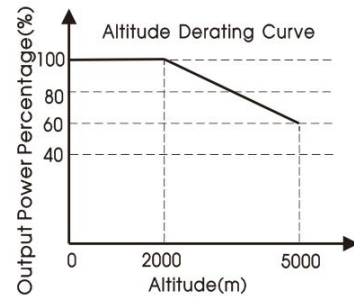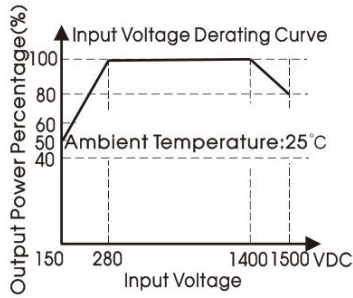

- Note:
- ① With a DC input between 150-280VDC/1400-1500VDC, the output power must be derated as per temperature derating curves;
 - ② For operation of this converter series in an altitude between 2000 - 5000m above sea level, the output power must be derated as per the altitude derating curve;
 - ③ The electrolytic capacitors have a constant lifetime, the service life depends on the actual ambient temperature, operating in harsh environments can affect the life of a product, shorten the service life of the product, it's not recommended that the product work in high temperature environment above 65°C for a long time.
 - ④ This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

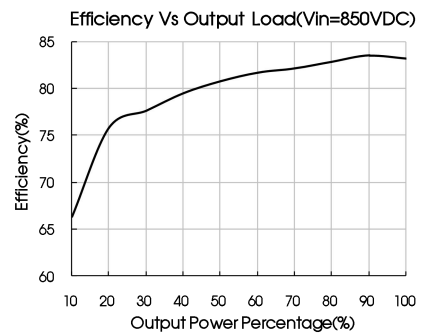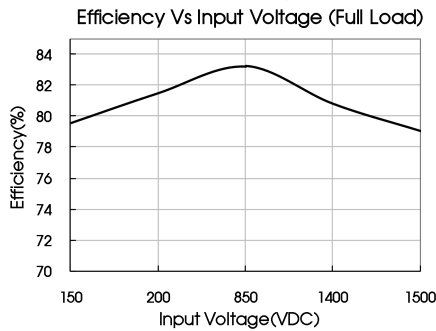

Design Reference

1. Typical application

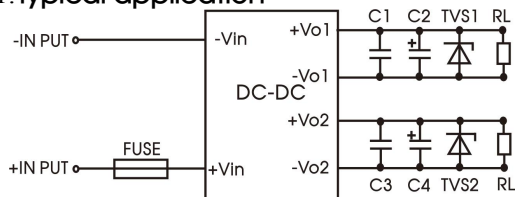


Fig. 1: Typical application circuit

Model	C1, C3	C2, C4	TVS1	TVS2	FUSE
PV50-29D1505-20	1 μ F	100 μ F	SMBJ20A	SMBJ7.0 A	4A/1500VDC, slow-blow, required

Note on filter components:

We recommend using an electrolytic capacitor with high frequency and low ESR rating for C2, C4 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1, C3 are a 1 μ F ceramic capacitor, used to filter high-frequency noise. TVS is a recommended suppressor diode to protect the application in case of a converter failure.

2. EMC compliance recommended circuit

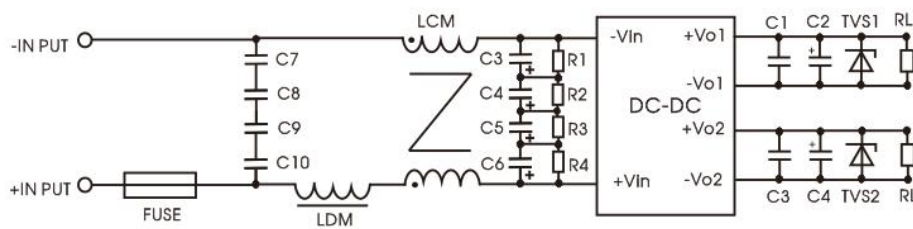




Fig 2.

Element model	Recommended value
C7, C8, C9, C10	104K/275VAC
C3, C4, C5, C6	47 μ F/450VDC
R1, R2, R3, R4	1M Ω /2W
LDM	330 μ H/0.38A
LCM	7mH/1A
FUSE	4A/1500VDC, slow-blow, required

3. For more information Please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

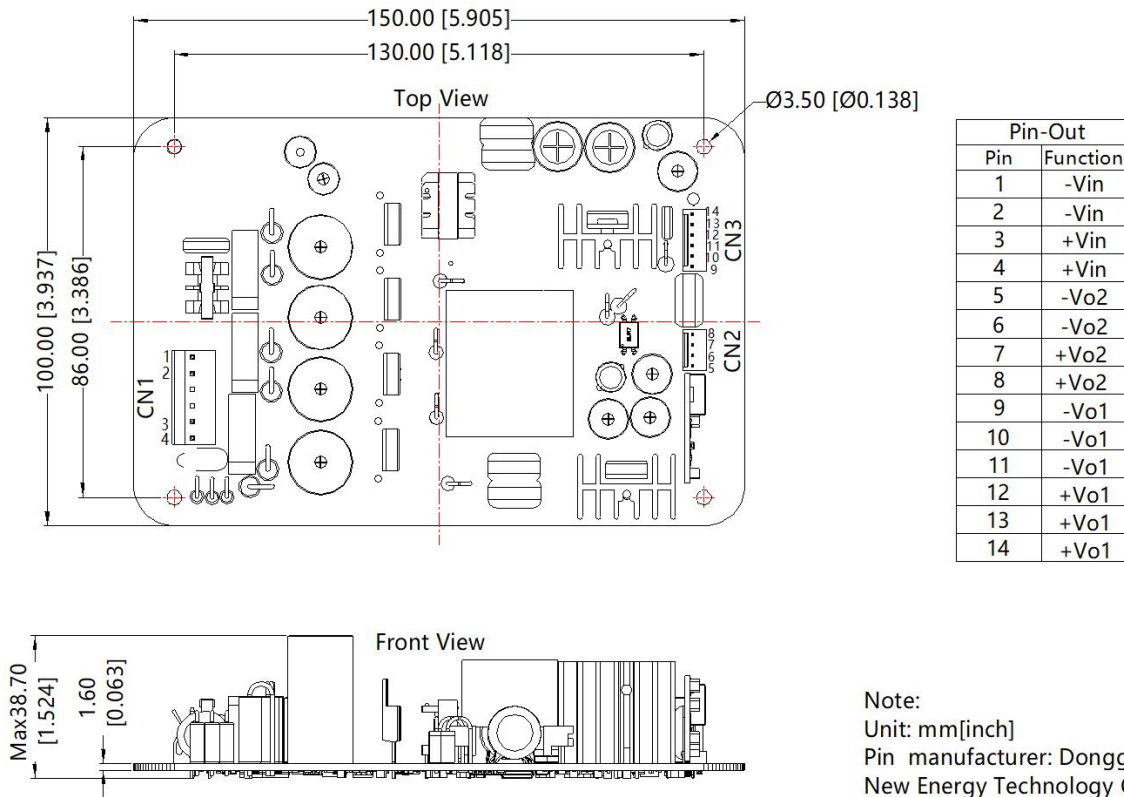

Note:
Unit: mm[inch]
Pin manufacturer: Dongguan KD
New Energy Technology Co.,LTD
CN1 VH 3.96-6P(No mid-2P)
CN2 2.54-4P
CN3 2.54-6P
General tolerances: $\pm 1.0[\pm 0.039]$

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220080;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency, there will be audible noise generated when working at input voltage higher than 1000VDC, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com